



For Earth, For Life
Kubota

U

KUBOTA TIGHT TAIL SWING COMPACT EXCAVATOR **U48-5**

The next generation of tight tail swing compact excavators with advanced performance, comfort, and technology.



Introducing the all-new Kubota into our product line-up.

Kubota, a trusted and world-leading manufacturer of construction equipment, is proud to introduce the new U48-5. It delivers superior performance and operator comfort for maximum productivity.




Kubota excavator



The Answer to Our Customers

For almost a decade, our offer to the customer who requires a tight tail excavator bigger than 4 ton was the U55. While this product line-up satisfied most of our customers, we have received many requests for an additional choice with appropriate performance at a more affordable price. Kubota strongly believes that the introduction of the U48-5 is the right answer to those requests.

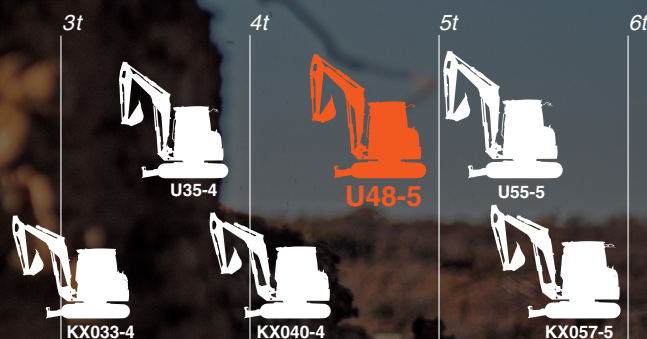

KUBOTA TIGHT TAIL SWING COMPACT EXCAVATOR

U48-5

Engine gross horsepower (SAE J 1995): 40.4 HP (30.1 kW)

Bucket breakout force: 9304 lbs. (4220 kg)

Operating weight (cab, incl. operator weight 165 lbs.):
11057 lbs. (5015 kg)

OPERATOR COMFO

A bigger cab with enhanced insulation, improved visibility, and a wealth of new comfort features.

Spacious & Comfortable Cab

With new interior designs, the cabs offer improved comfort for operators of any size. The designs feature a slimmer, more ergonomically positioned right meter panel and greater head and foot space. The result is more room and greater comfort for the operator, and that means improved productivity on the job.

Expanded Glass Area

A slimmer frame design means more glass in the front window, skylight, and left and right windows. This greater glass area not only improves visibility during loading, unloading, and digging work—operators can monitor the left and right edges of the dozer as well as the bucket through the skylight—it also enhances the feeling of spaciousness in the cab.



RT / EASE OF USE



A Back-lighted Key Pad

Redesigned for greater comfort and improved operability, the key pad features a compact profile and places all of the main switches on the right side for easier access.

B Enhanced Legroom

The new cab design and interior layout not only optimize operability, but also provide much more foot space for greater operator comfort.



Air Conditioner

The air conditioner duct now directs air to the back of the operator's neck to enhance the effect and efficiency of the air conditioning.



Low Noise*

World-class noise reduction technology helps protect the operator's hearing as well as provides a more comfortable working environment for the operator. Rear engine noise is reduced by a metal partition between the engine and the cab. The floor plate is also thicker to reduce noise from beneath the cab.

74dB*

* Noise Level for Cab Spec

PERFORMANCE /

Advanced technology ensures superior performance and operability in real-world working conditions.

Working Range

Kubota's new 4.8-ton compact excavators deliver impressive performance and efficiency for their size, with exceptional bucket digging force, outstanding arm reach, and a well-matched arm and bucket. Even tough digging jobs will get done faster and more efficiently.

Versatile Control


Two auxiliary circuits (AUX1 and AUX2) are available on the U48-5. The maximum oil flow settings of both circuits are conveniently adjustable from the digital panel. No additional tools or complex manual adjusting procedures are necessary.

Load Sensing Hydraulic System

Kubota's load sensing hydraulic system ensures smoother operation, regardless of load size. It allows hydraulic oil to flow according to the specific range of the operator's lever motion. The result is greater fuel economy and smoother travelling.

Hydraulic Angle Blade

Save time and work more efficiently. With a simple movement of the dozer lever, the hydraulic Angle Blade can be angled to the right or left to push soil to the side as the machine moves forward, eliminating the need for repetitive repositioning at right angles when backfilling trenches.

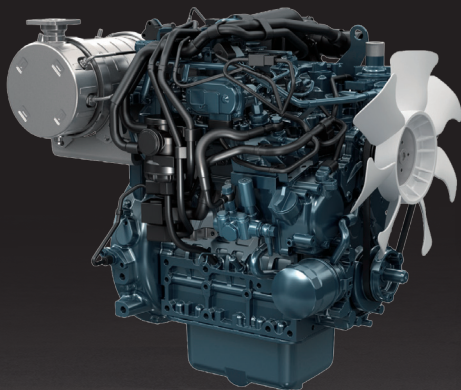


Kubota Original DI Engine with CRS and DPF Muffler

The new Kubota's direct-injection engine is equipped with CRS and with a new and improved DPF which reduces maintenance by increasing the service intervals for both the regeneration filter and ash cleaner.

Automatic Regeneration System

DPF regeneration (PM combustion stroke) is performed automatically, before soot reaches a critical level, so the operator never needs to stop work to clean the DPF.

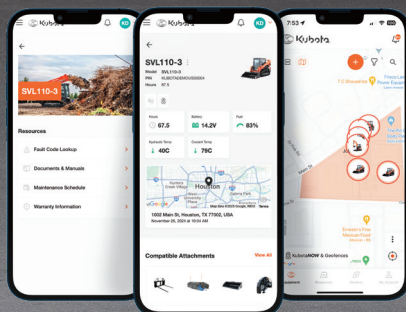

Telematics Standard

The Kubota telematics solution connects your Kubota equipment to the tools you use. Get critical information like accumulated hours, fuel level, location, temperatures and more. WorkSmart Telematics gives you the right information when and where you need it.


Purchases of new current year U48-5 models come with a 3-year subscription to WorkSmart Telematics. See KubotaUSA.com for complete terms and details about account activation. Purchase of subscription required to access all features and services after 3 years. Services subject to data service connectivity and location availability. Fees for subscriptions are subject to change.



TECHNOLOGY



LED Work Lights with Turn-off Delay

The LED work lights can be programmed to turn off 30 seconds to 2 minutes after the engine has stopped. This allows the operator to exit the machine and walk away safely under full illumination.

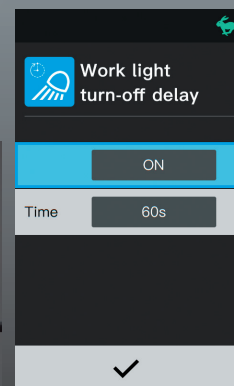

Keyless Start

Keyless start is standard. The engine can be started by entering a 4 digit passcode using the excavator key pad and up to 10 user passwords can be set. With this new function, customers no longer have to worry about lost keys.

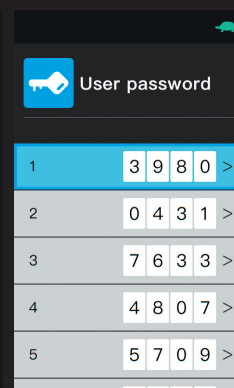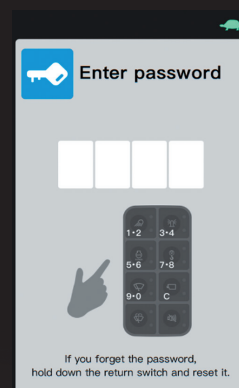

Rear-view Camera (option)

Factory designed rear-view camera provides increased visibility towards the rear of the compact excavator by displaying the view on the 7" LCD screen in the cab.




Travel Alarm (option)

An optional travel alarm warns nearby workers and/or bystanders that the excavator is on the move.

SERVICE


A fully opening bonnet and optimum arrangement of internal parts for quick and efficient service and shorter downtime.

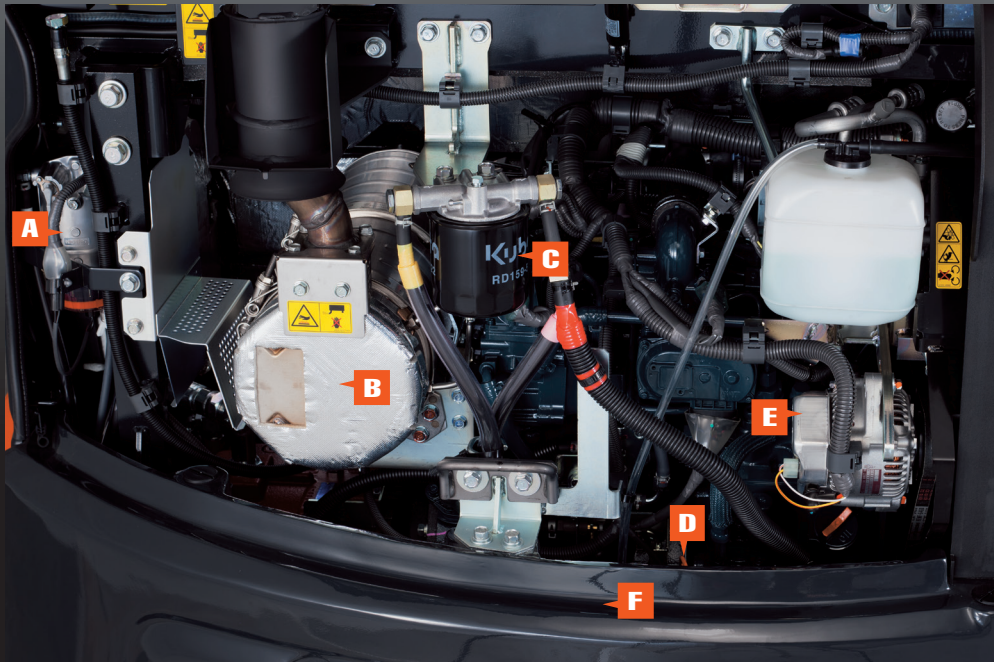

- A WATER SEPARATOR**
- B DPF MUFFLER**
- C FUEL FILTER**
- D ENGINE OIL GAUGE**
- E ALTERNATOR**
- F STARTER MOTOR**

One-sided Engine Maintenance

Kubota has made routine maintenance extremely simple by consolidating primary engine components onto one side for easier access. Engine and other vital components can be inspected quickly and easily.

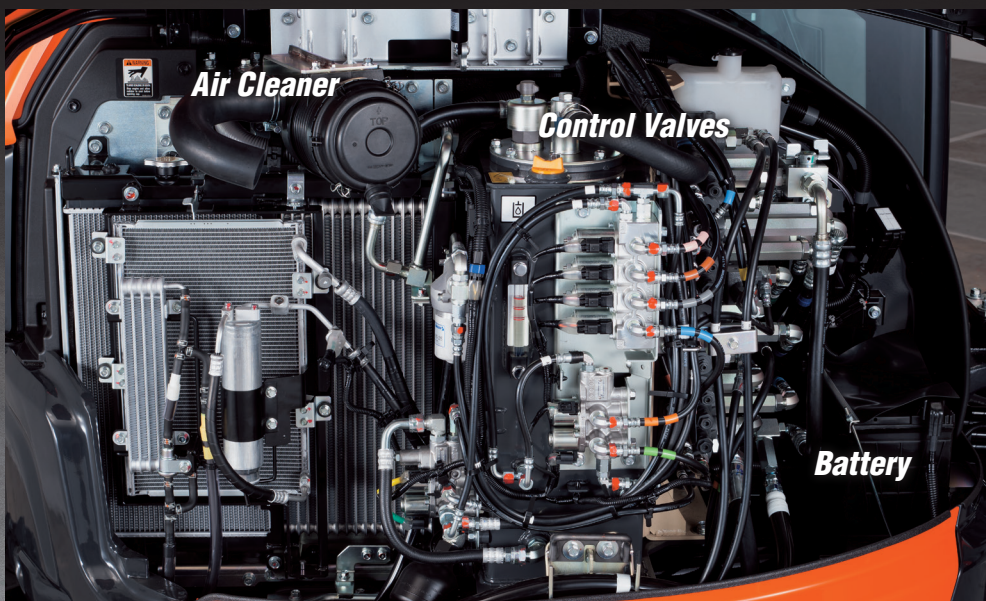

Side-hood Features

The radiator, oil cooler and A/C condensor are conveniently re-positioned inside the side-hood bonnet. The new layout and A/C condensor tilt open structure provides an easier and more efficient way to clean and maintain the cooling system. With this, you can keep your machine performing in the best condition.



Two-piece Hose Design

The dozer blade's two-piece hose design reduces hose replacement by 60% compared to one-piece hoses.




Tool Storage Box with Grease Gun Holder

The tool storage box is conveniently located under the cab door for quick access. The box also features a grease gun holder to keep the grease gun within easy reach during maintenance.



DIGITAL PANEL

Intuitive operation and large LCD screen help to enhance both safety and performance.

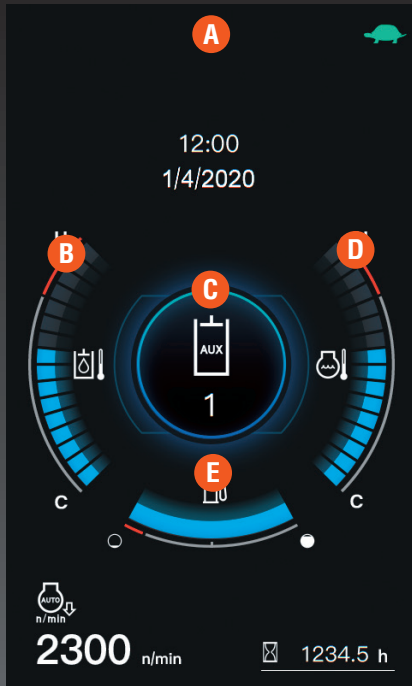


Standard Monitor Display

NEW FULL-COLOR LCD SCREEN WITH JOG DIAL


A full-color, high-resolution 7" LCD screen provides with a single glance all the information the operator needs to operate the mini excavator. An intuitive interface ensures quick understanding and easy access to the mini excavator's various functions, including AUX flow adjustment. Important maintenance items are also displayed, as are detailed alerts for improper machine functions and abnormalities. The new jog dial is both intuitive and easy to use. Even first-time operators will be able to quickly access all important information. A keyless start system is standard for the operator's convenience.

Menu icons

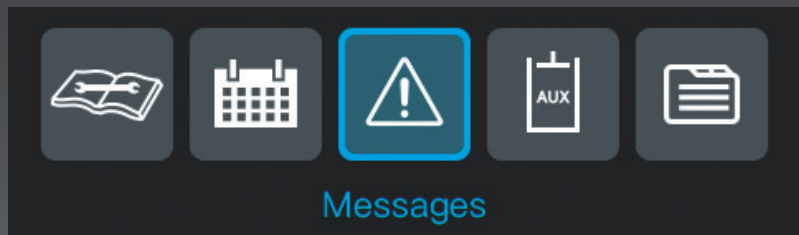


Messages


- A** Alert Indicator
- B** Hydraulic Temperature
- C** AUX Mode
- D** Water Temperature
- E** Fuel Level

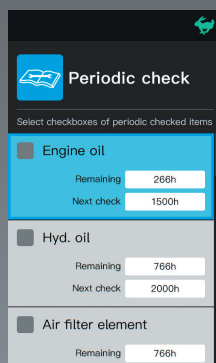


Periodic Check

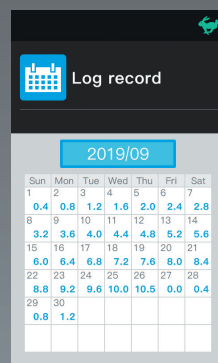


Log Record

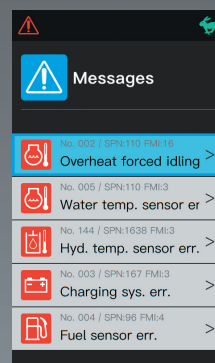

Message Mode

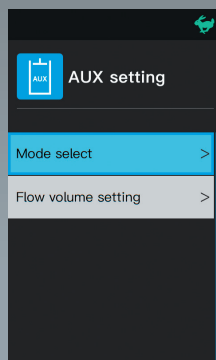

AUX Setting

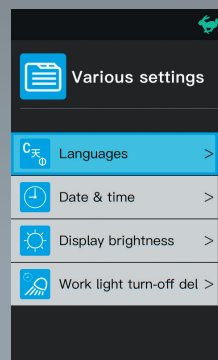

Various Setting

- A.** Menu Key
- B.** Return Key
- C.** Jog Dial
- D.** Working Light
- E.** Beacon Light (Opt.)
- F.** Auto Idle
- G.** Wiper
- H.** Rear-view Camera (Opt.)
- I.** Washer Fluid
- J.** Travel Alarm Off (Opt.)



U48-5 OPTIONS

Standard Equipment

Machine safety system

- Engine start safety system
- Travel motor with disc brake
- Swivel motor with disc brake
- All hydraulic control

Working equipment

- Auxiliary hydraulic circuit 1
- 2 LED working lights on cab and 1 LED light on the boom
- Thumb bracket and relief valve
- Dozer blade with float function

Operator's space

- ROPS/FOPS canopy
- Retractable seat belt
- Hydraulic pilot control levers with wrist rests
- Travel levers with foot pedals
- Two pattern selection system
- 7" Full Color LCD screen
- 12V power source
- Cup holder
- Horn
- Keyless start

Engine/Fuel system

- Double element air filter
- Auto idling system
- Water separator with drain cock

Undercarriage

- Dozer blade with float
- 400 mm rubber track
- 1 × upper track roller
- 4 double-flange track rollers on each side
- 2-speed travel switch on dozer lever
- 2-speed travel with auto-shift

Hydraulic system

- 1-pump load sensing system
- Pressure accumulator
- Hydraulic pressure checking ports
- Straight travel circuit
- Adjustable maximum oil flow on auxiliary hydraulic circuits 1
- Third line hydraulic return
- Auxiliary switch (AUX1) on right control lever

Others

- Tool box
- Grease gun holder
- WorkSmart Telematics

Optional Equipment

- Cab with A/C
- Canopy lights (LED)
- Beacon lights
- 1'3.7" (400 mm) steel track for Angle blade model
- Additional auxiliary hydraulic circuit 2 (adjustable max. oil flow control)
- Angle blade with float function and BOE
- Travel alarm
- Air suspension seat
- Rear-view camera
- Sunshade
- Front guard
- Rear-view mirror

Stay connected with WorkSmart TELEMATICS


WorkSmart Telematics gives you the right information, when and where you need it. To access WorkSmart Telematics information, download the myKubota app and stay connected to your Kubota machine. Get information like hours, fuel level, location, temperatures, error codes, and more.



DOWNLOAD THE
My Kubota APP

Working Range


Model			U48-5	
A	Max. digging height		ft. in. (mm)	17'4" (5285)
B	Max. dumping height		ft. in. (mm)	12'9" (3895)
C	Max. digging depth		ft. in. (mm)	10'8" (3255)
D	Max. vertical digging depth		ft. in. (mm)	4'5" (1345)
E	Max. digging radius, at ground level		ft. in. (mm)	18'4" (5585)
F	Max. digging radius		ft. in. (mm)	18'10" (5735)
G	Min. turning radius	W/o swing	ft. in. (mm)	7'10" (2400)
		With swing	ft. in. (mm)	6'5" (1960)
H	Min. tail turning radius		ft. in. (mm)	3'4" (1010)

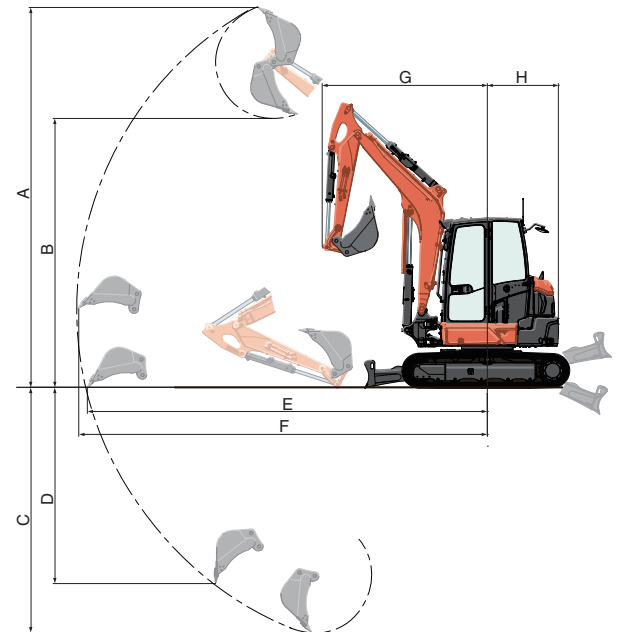

Lifting Capacity

LIFT POINT HEIGHT (ft)		LIFTING CAPACITY OVER-FRONT BLADE DOWN unit=1000 lbs			LIFTING CAPACITY OVER-SIDE unit=1000 lbs		
		LIFT POINT RADIUS (ft)			LIFT POINT RADIUS (ft)		
		12	14	MAX	12	14	MAX
GL	10	1.89	1.86	1.88	1.79	1.39	1.25
	8	2.08	1.93	1.88	1.75	1.37	1.13
	4	2.64	2.22	1.92	1.63	1.31	1.03
	0	2.94	2.38	1.98	1.55	1.26	1.07



Machine with canopy, standard blade and rubber track, without bucket

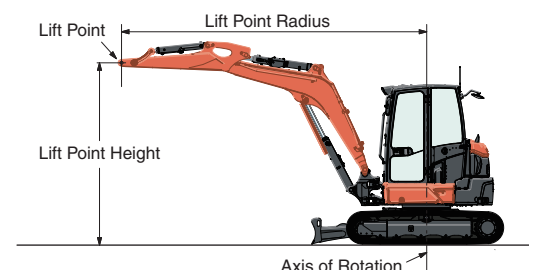

Specifications

Model				U48-5		U48-5 Angle Blade	
Type of ROPS / FOPS				Canopy / Cab			
Type of tracks				Rubber / Steel		Rubber / Steel	
Engine	Model			D1803-CR-TE5-BH3 / D1803-CR-TE5-BH4			
	Output (SAE J1995 gross)		HP (kW) @ rpm	40.4 (30.1) @ 2200			
	Output (SAE J1349 net)		HP (kW) @ rpm	38.9 (29.0) / 38.5 (28.7) @ 2200			
	Displacement		cu. in. (cc)	111.4 (1826)			
Dimensions	Overall length		ft. in. (mm)	17'7" (5355)			
	Overall height		ft. in. (mm)	8'4" (2550)			
	Overall width		ft. in. (mm)	6'5" (1960)			
	Min. ground clearance		in. (mm)	12" (310)			
Hydraulic system	Pump capacity		GPM (ℓ/min)	31.4 (118.8)			
	Auxiliary hydraulic flow	AUX1 / AUX2	GPM (ℓ/min)	17.2 (65.0) / 9.8 (37)			
	Max. breakout force	Bucket / Arm	lbs. (kgf)	9304 (4220) / 5304 (2406)			
Drive system	Travel speed	Low / High	mph (km/h)	1.7 (2.8) / 3.0 (4.9)			
	Max. traction force	Low speed	lbs. (kgf)	11993 (5440)			
	Tumbler distance		ft. in. (mm)	6'6" (1990)			
	Crawler length		ft. in. (mm)	8'2" (2500)			
	Shoe width		in. (mm)	15.7" (400) / 15.7" (400)			
	Ground contact pressure	Rubber Canopy / Cab	psi (kgf/cm²)	4.0 (0.284) / 4.1 (0.289)		4.2 (0.296) / 4.3 (0.302)	
		Steel Canopy / Cab	psi (kgf/cm²)	4.1 (0.290) / 4.2 (0.295)		4.3 (0.302) / 4.4 (0.307)	
Swing system	Unit swing speed		rpm	9.2			
	Boom swing angle	Left / Right	degree	70 / 53			
Blade	Dimensions	Width	ft. in. (mm)	6'5" (1960)			
		Height	ft. in. (mm)	1'4" (410)		1'5" (425)	
	Max. lift above ground		in. (mm)	1'5" (440)		1'8" (510)	
	Max. drop below ground		in. (mm)	1'4" (405)		1'6" (465)	
	Angle	Left / Right	degree	—		25 / 25	
Hydraulic oil (Reservoir / System)			gal (ℓ)	10.6 (40) / 20.1 (76)			
Fuel reservoir			gal (ℓ)	17.4 (66.0)			
Operating weight (Including operator's weight @ 165 lbs.)		Rubber Canopy / Cab	lbs. (kgf)	10848 (4920) / 11057 (5015)		11322 (5135) / 11531 (5230)	
		Steel Canopy / Cab	lbs. (kgf)	11134 (5050) / 11342 (5145)		11608 (5265) / 11818 (5360)	

Dimensions

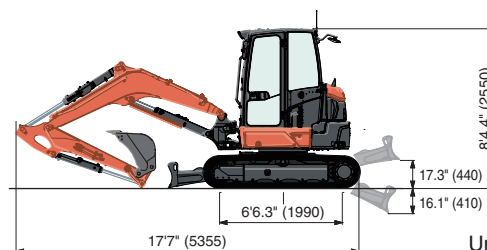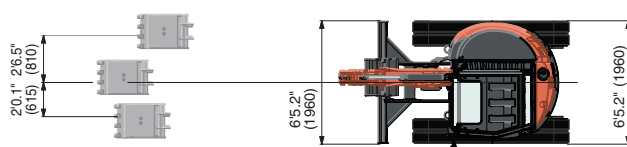

Unit: ft. in. (mm)

Kubota Tractor Corporation reserves the right to change the stated specifications without notice. This brochure is for descriptive purposes only and reasonable efforts were used to set forth the contained information; some items shown may be optional and some products shown may not be available at all dealerships. Kubota disclaims all representations and warranties, express or implied, or any liability from the use of this brochure. For complete warranty, safety and product information, consult your local Kubota dealer and the operator's manual. Power (HP/KW) and other specifications are based on various standards or recommended practices. For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications. This brochure is intended for the United States and US territories only. For information regarding Kubota products or services outside these areas, see Kubota Corporation's global web site. Kubota does not provide parts, warranty or service for any Product which is re-sold or retained in any country other than the country for which the Product(s) were designed or manufactured.



KUBOTA TRACTOR CORPORATION

1000 Kubota Drive, Grapevine, TX 76051 Tel 888-4 KUBOTA

Visit our web site at: www.kubotausa.com

©2026 Kubota Corporation



**Kubota
Genuine Parts**
for maximum
performance,
durability and
safety

