

Specifications

Model				K008-5	U10-5
Type of ROPS / FOPS				Canopy	
Type of tracks				Rubber	
Engine	Model			D722-E4-BH-4US	D722-E4-BH-5US
	Output (SAE J1995 gross)		HP (kW) @ rpm	10.3 (7.7) @ 2050	
	Output (SAE J1349 net)		HP (kW) @ rpm	10.1 (7.5) @ 2050	
	Displacement		cu. in. (cc)	43.8 (719)	
Dimensions	Overall length		ft. in. (mm)	9'0" (2750)	9'9" (2980)
	Overall height		ft. in. (mm)	7'4" (2230)	7'5" (2260)
	Overall width	Standard	ft. in. (mm)	2'10" (860)	3'3" (990)
		Narrow	ft. in. (mm)	2'7" (800)	2'6" (750)
	Track gauge	Standard	ft. in. (mm)	2'10" (860)	3'3" (990)
		Narrow	ft. in. (mm)	2'4" (700)	2'6" (750)
	Min. ground clearance		in. (mm)	5.9" (150)	5.5" (140)
Hydraulic system	Pump capacity		GPM (ℓ/min)	2.8 (10.5) × 2	2.8 (10.5) × 2 / 0.8 (3.1) × 1
	Auxiliary hydraulic flow		GPM (ℓ/min)	5.5 (21)	
	Max. breakout force	Bucket / Arm	lbs. (kgf)	2205 (1000) / 1012 (458.9)	2337 (1060) / 1214 (550.6)
Drive system	Travel speed	Low / High	mph (km/h)	1.2 / 2.5 (2.0 / 4.0)	
	Tumbler distance		ft. in. (mm)	2'11" (900)	3'4" (1010)
	Crawler length		ft. in. (mm)	4'0" (1230)	4'5" (1340)
	Shoe width		in. (mm)	7.1" (180)	
	Ground contact pressure		psi (kgf/cm^2)	4.1 (0.29)	4.2 (0.30)
Swing system	Unit swing speed		rpm	8.3	
	Boom swing angle	Left / Right	degree	55 / 55	
Blade	Dimensions	Width Std / Narrow	ft. in. (mm)	2'10" (860) / 2'4" (700)	3'3" (990) / 2'6" (750)
		Height	in. (mm)	7.9" (200)	
	Max. lift above ground		in. (mm)	7.9" (200)	8.5" (215)
	Max. drop below ground		in. (mm)	7.1" (180)	7.5" (190)
Hydraulic oil (Reservoir / System)			gal (ℓ)	3.6 / 4.8 (13.5 / 18)	3.3 / 4.5 (12.6 / 17.1)
Fuel reservoir			gal (ℓ)	3.2 (12)	
Operating weight (Including operator's weight @ 165 lbs.)			lbs. (kgf)	2315 (1050)	2646 (1200)

Dimensions

K008-5 / U10-5



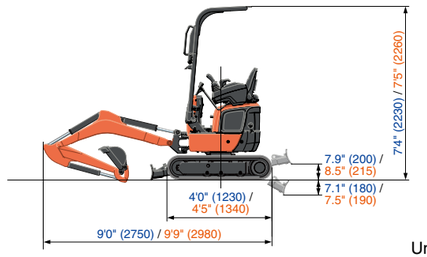

Unit: ft. in. (mm)

Kubota Tractor Corporation reserves the right to change the stated specifications without notice. This brochure is for descriptive purposes only and reasonable efforts were used to set forth the contained information; some items shown may be optional and some products shown may not be available at all dealerships. Kubota disclaims all representations and warranties, express or implied, or any liability from the use of this brochure. For complete warranty, safety and product information, consult your local Kubota dealer and the operator's manual. Power (HP/KW) and other specifications are based on various standards or recommended practices. For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications. This brochure is intended for the United States and US territories only. For information regarding Kubota products or services outside these areas, see Kubota Corporation's global web site. Kubota does not provide parts, warranty or service for any Product which is re-sold or retailed in any country other than the country for which the Product(s) were designed or manufactured.

KUBOTA TRACTOR CORPORATION
1000 Kubota Drive, Grapevine, TX 76051 Tel 888-4 KUBOTA
Visit our web site at: www.kubotausa.com

©2022 Kubota Corporation

ROPS SEATBELT
PUT 'EM ON KEEP 'EM ON
SAFETY
IT'S THE WAY TO LIVE!®

Kubota Genuine Parts
for maximum performance, durability and safety



Cat. No.8984A-01-US Printed in Japan '22-01D. ◁▷. 10

For Earth, For Life
Kubota

U

KUBOTA ULTRA-COMPACT EXCAVATORS

K008-5 / U10-5

The next generation of ultra-compact excavators with advanced performance and comfort.





SPECIFICATIONS

Model				KX018-4
Type of ROPS / OPG (Top Guard, Level Ⅰ)				Canopy / Cab
Type of tracks				Rubber
Engine	Model			Kubota D902-BH-E4
	Output (SAE J1995 gross)		HP (kW)/rpm	15.3 (11.4) / 2300
	Output (SAE J1349 net)		HP (kW)/rpm	15.5 (11.6) / 2300
	Displacement		cu. in. (cc)	54.80 (898)
Dimensions	Overall length		ft. in. (mm)	12'2.1" (3710)
	Overall height		ft. in. (mm)	7'7.7" (2330) / 7'8.5" (2350)
	Overall width		ft. in. (mm)	4'3.2" (1300) – 3'3.0" (990)
	Min. ground clearance		in. (mm)	6.3" (160)
Hydraulic system	Pump capacity		GPM (ℓ/min)	4.6 (17.3) × 2 / 2.8 (10.4) × 1 / 1.7 (6.2) × 1
	Auxiliary hydraulic flow		GPM (ℓ/min)	7.4 (27.7)
	Max. breakout force	Bucket / Arm	lbf. (kgf)	3594 (1630) / 1852 (840)
Drive system	Travel speed	Low / High	mph (km/h)	1.4 (2.2) / 2.5 (4.0)
	Max. traction force		lbs. (kgf)	4542 (2060)
	Tumbler distance		ft. in. (mm)	4'1" (1230)
	Crawler length		ft. in. (mm)	5'2.6" (1590)
	Shoe width		in. (mm)	9.1" (230)
	Ground contact pressure		psi (kgf/cm^2)	3.7 (0.26) / 3.8 (0.27)
Swing system	Unit swing speed		rpm	9.1
	Boom swing angle	Left / Right	degree	75 / 60
Blade	Dimensions	Width	ft. in. (mm)	4'3.2" (1300) – 3'3.0" (990)
		Height	in. (mm)	9.1" (230)
	Max. lift above ground		in. (mm)	9.1" (230)
	Max. drop below ground		in. (mm)	9.1" (230)
Hydraulic oil (reservoir / system)			gal (ℓ)	4.1 (15.5) / 7.4 (28)
Fuel reservoir			gal (ℓ)	5.6 (21)
Operating weight (Including operator's weight 165 lbs.)			lbs. (kg)	3737 (1695) / 3957 (1795)

The company reserves the right to change the above specifications without notice. This brochure is for descriptive purposes only.
Please contact your local Kubota dealer for warranty information.
For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt for almost all applications.

DIMENSIONS

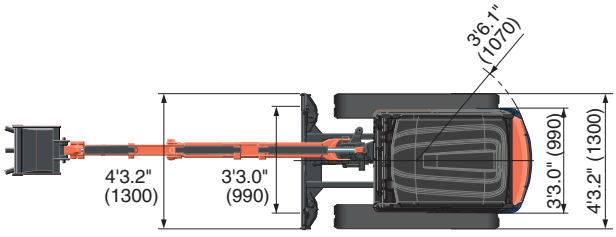

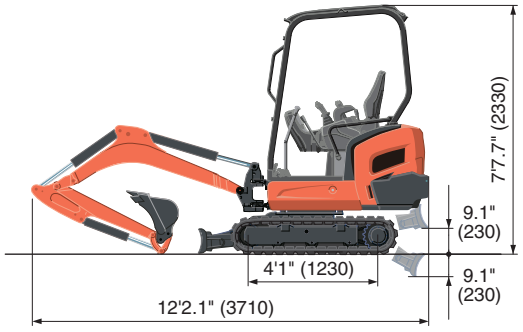

Unit: ft. in. (mm)

Kubota®

KUBOTA TRACTOR CORPORATION
1000 Kubota Drive, Grapevine, TX 76051 Tel 888-4 KUBOTA

Visit our web site at: www.kubotausa.com

©2021 Kubota Corporation

ROPS SEATBELT
PUT 'EM ON ← KEEP 'EM ON
SAFETY
IT'S THE WAY TO LIVE!®


Kubota Genuine Parts
for maximum performance, durability and safety



SPECIFICATIONS

Model				KX030-4
Type of ROPS / FOPS				Canopy / Cab
Type of tracks				Rubber
Engine	Model			V1505-E4-BH-3USA
	Output (SAE J1995 gross)		HP (kW) / rpm	23.3 (17.4) /@2250
	Output (SAE J1349 net)		HP (kW) / rpm	22.4 (16.7) /@2250
Dimensions	Overall length		ft. in. (mm)	15'1.1" (4600)
	Overall height		ft. in. (mm)	7'11" (2420)
	Overall width		ft. in. (mm)	4'11" (1500)
	Min. ground clearance		in. (mm)	11.6" (295)
Hydraulic system	Pump capacity		gpm (ℓ/min.)	8.3 (31.5) × 2 / 4.7 (18) × 1
	Auxiliary hydraulic flow		gpm (ℓ/min.)	13.1 (49.5)
	Max. breakout force	Bucket / Arm	lbs. (kgf)	6924 (3140.7) / 3484 (1580.6)
Drive system	Travel speed	Low / High	mph (km/h)	1.7 (2.7) / 2.7 (4.3)
	Max. traction force	Low speed	lbs. (kgf)	7330 (3325)
	Tumbler distance		ft. in. (mm)	5'1.4" (1560)
	Crawler length		ft. in. (mm)	6'5.9" (1980)
	Shoe width	Rubber	in. (mm)	11.8" (300)
	Ground contact pressure	Canopy / Cab	psi (kgf/cm²)	3.9 (0.27) / 4.0 (0.28)
Swing system	Unit swing speed		rpm	9.2
	Boom swing angle	Left / Right	degree	76 / 57
Blade	Dimension	Width	ft. in. (mm)	4'11" (1500)
		Height	in. (mm)	11.8" (300)
	Max. lift above ground		in. (mm)	13.8" (352)
	Max. drop below ground		in. (mm)	13.5" (345)
Hydraulic oil (reservoir / system)			gal (ℓ)	9.0 (33.9) / 13.7 (52.0)
Fuel reservoir			gal (ℓ)	12.7 (48.0)
Operating weight (Includes operator weight 175lbs.)		Canopy / Cab	lbs. (kgf)	6272 (2845) / 6426 (2915)

DIMENSIONS

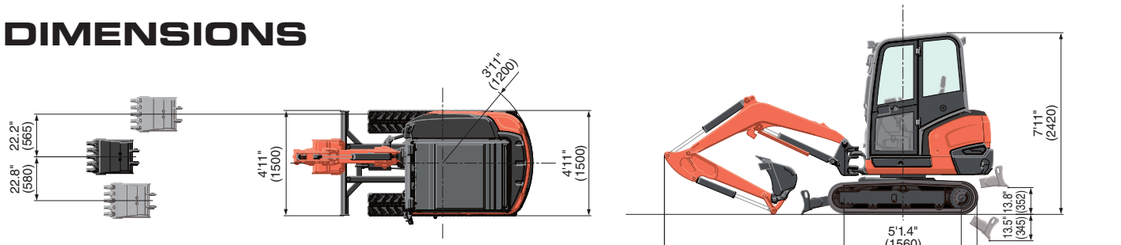

Unit: ft. in. (mm)

Kubota Tractor Corporation reserves the right to change the stated specifications without notice. This brochure is for descriptive purposes only and reasonable efforts were used to set forth the contained information; some items shown may be optional and some products shown may not be available at all dealerships. Kubota disclaims all representations and warranties, express or implied, or any liability from the use of this brochure. For complete warranty, safety and product information, consult your local Kubota dealer and the operator's manual. Power (HP/KW) and other specifications are based on various standards or recommended practices. For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications. This brochure is intended for the United States and US territories only. For information regarding Kubota products or services outside these areas, see Kubota Corporation's global web site. Kubota does not provide parts, warranty or service for any Product which is re-sold or retailed in any country other than the country for which the Product(s) were designed or manufactured.

Kubota®

KUBOTA TRACTOR CORPORATION

1000 Kubota Drive, Grapevine, TX 76051 Tel 888-4 KUBOTA

Visit our web site at: www.kubotausa.com

©2024 Kubota Corporation





Cat. No.8976B-01-US Printed in Japan '24-12D. <2>. 2

For Earth, For Life

Kubota

KX

KUBOTA COMPACT EXCAVATOR

KX030-4

Designed for efficiency, built for stability, and created for comfort, the new KX030-4 redefines the compact excavator.





SPECIFICATIONS

Model				KX033-4	KX033-4 Angle Blade
Arm				Standard	
Type of ROPS / OPG (TOP Guard, Level I)				Canopy / Cab	
Type of tracks				Rubber / Steel	
Engine	Model			Kubota D1703M-DI-E4	
	Output (SAE J1995 gross)		HP (kW) / rpm	23.3 (17.4) / @2200	
	Output (SAE J1349 net) Canopy / Cab		HP (kW) / rpm	22.4 (16.7) / 22.3 (16.6) / @2200	
	Displacement		cu. in. (cc)	100.5 (1647)	
Dimensions	Overall length		ft. in. (mm)	15'6" (4730)	
	Overall height		ft. in. (mm)	8'1" (2480) / 8'1" (2470)	
	Overall width		ft. in. (mm)	5'1" (1550)	
	Min. ground clearance		in. (mm)	11.4 (290)	
	Boom offset	Right / Left	ft. in. (mm)	1'4.1" (410) / 1'5.7" (450)	
	Blade lift	Upper / Low	ft. in. (mm)	1'2.4" (365) / 1'2.8" (375)	
Hydraulic system	Pump capacity		GPM (ℓ/min)	10.5 (39.6) x 2 / 5.5 (20.9) x 1	
	Auxiliary hydraulic flow		GPM (ℓ/min)	15.8 (60)	
	Max. breakout force	Bucket / Arm	lbs. (kgf)	8138 (3694) / 3867 (1756)	
Drive system	Travel speed	Low / High	mph (km/h)	1.9 (3.0) / 2.9 (4.6)	
	Max. traction force	Low speed	lbs. (kgf)	6091 (2763)	
	Tumbler distance		ft. in. (mm)	5'5.6" (1665)	
	Crawler length		ft. in. (mm)	6'10.6" (2100)	
	Shoe width	Rubber / Steel	in. (mm)	11.8 (300)	
	Ground contact pressure*2	Canopy Rubber / Steel	psi (kgf/cm²)	4.365 (0.307) / 4.482 (0.315)	4.583 (0.322) / 4.700 (0.331)
		Cab Rubber / Steel	psi (kgf/cm²)	4.559 (0.321) / 4.676 (0.329)	4.776 (0.336) / 4.894 (0.344)
Swing system	Unit swing speed		rpm	8.9	
	Boom swing angle	Left / Right	degree	70 / 48	
Blade	Dimensions	Width	ft. in. (mm)	5'1" (1550)	
		Height	ft. in. (mm)	1'1.5" (345)	1'3.2" (385)
	Max. lift above ground		in. (mm)	14.4 (365)	15.9 (405)
	Max. drop below ground		in. (mm)	14.8 (375)	18.9 (480)
	Angle	Left / Right	degree	-	25 / 25
Hydraulic oil (Reservoir / System)			gal (ℓ)	11.8 (44.6) / 16.1 (61)	
Fuel reservoir			gal (ℓ)	12.4 (46.9)	
Operating weight*1 (Including operator's weight @ 165 lbs.)		Canopy Rubber / Steel	lbs. (kgf)	7420 (3365) / 7616 (3454)	7781 (3529) / 7978 (3618)
		Cab Rubber / Steel	lbs. (kgf)	7742 (3511) / 7938 (3600)	8104 (3675) / 8300 (3764)

*1 Operating weight will increase 440lbs. (200kg) when extendable arm is equipped.
*2 Ground contact pressure will increase 0.265 psi when extendable arm is equipped.

DIMENSIONS



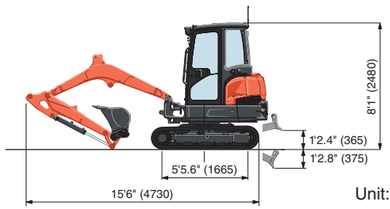

Unit: ft. in. (mm)

Kubota Tractor Corporation reserves the right to change the stated specifications without notice. This brochure is for descriptive purposes only and reasonable efforts were used to set forth the contained information; some items shown may be optional and some products shown may not be available at all dealerships. Kubota disclaims all representations and warranties, express or implied, or any liability from the use of this brochure. For complete warranty, safety and product information, consult your local Kubota dealer and the operator's manual. Power (HP/KW) and other specifications are based on various standards or recommended practices. For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications. This brochure is intended for the United States and US territories only. For information regarding Kubota products or services outside these areas, see Kubota Corporation's global web site. Kubota does not provide parts, warranty or service for any Product which is re-sold or retailed in any country other than the country for which the Product(s) were designed or manufactured.

Kubota®

KUBOTA TRACTOR CORPORATION
1000 Kubota Drive, Grapevine, TX 76051 Tel 888-4 KUBOTA

Visit our web site at: www.kubotausa.com

©2024 Kubota Corporation





Cat. No.8921F-01-US Printed in Japan '24-12D. ◁▷. 15.9

For Earth, For Life
Kubota

KX

KUBOTA COMPACT EXCAVATOR

KX033-4

Designed for efficiency, built for stability, and created for comfort, the new KX033-4 redefines the compact excavator.




SPECIFICATIONS

Model				KX040-5	KX040-5 Angle Blade	KX040-5 6-in-1 Blade
Type of ROPS / OPG (TOP Guard, Level I)				Canopy, Cabin		
Type of tracks				Rubber, Steel	Rubber, Steel	Rubber, Steel
Engine	Model	Canopy / Cab		Kubota D1803-CR-TE5-BH5 / D1803-CR-TE5-BH6		
	Output (SAE J1995 gross)		HP(kW) @ rpm	40.3 (30.1) @2200		
	Output (SAE J1349 net)	Canopy / Cab	HP(kW) @ rpm	39.1 (29.2) / 38.9 (29.0) @2200		
	Displacement		cu. in. (cc)	111.4 (1826)		
Dimensions	Overall length		ft. in. (mm)	16'8.2" (5085)		
	Overall height	Canopy / Cab	ft. in. (mm)	8'1.6" (2480) / 8'2.0" (2490)		
	Overall width		ft. in. (mm)	5'6.9" (1700)		5'10.9" (1800)
	Min. ground clearance	Rubber / Steel	ft. in. (mm)	1'1.0" (330) / 1'1.3" (338)		
Hydraulic system	Pump capacity		GPM (ℓ/min)	29.1 (110.0)		
	Auxiliary hydraulic flow	AUX1 / AUX2	GPM (ℓ/min)	17.2 (65.0) / 9.8 (37.0)		
	Max. breakout force	Bucket* / Arm	lbf. (kgf)	9397 (4262) / 4114 (1866)		
Drive system	Travel speed	Low / High	mph (km/h)	1.7 (2.7) / 3.1 (5.0)		
	Max. traction force	Low speed	lbf. (kgf)	5868 (2661.5)		
	Tumbler distance		ft. in. (mm)	5'7.3" (1710)		
	Crawler length	Rubber / Steel	ft. in. (mm)	7'1.6" (2175) / 7'3.2" (2215)		
	Shoe width		ft. in. (mm)	1'1.8" (350)		
	Ground contact pressure	Rubber Canopy / Cab	psi (kPa)	4.5 (31.1) / 4.7 (32.1)	4.7 (32.6) / 4.9 (33.6)	4.9 (33.8) / 5.0 (34.8)
		Steel Canopy / Cab	psi (kPa)	4.6 (31.5) / 4.7 (32.5)	4.8 (32.9) / 4.9 (33.9)	4.9 (34.1) / 5.1 (35.1)
Swing system	Unit swing speed		rpm	9.2		
	Boom swing angle	Canopy / Cab	degree	70 / 55		
Blade	Dimensions	Width	ft. in. (mm)	5'6.9" (1700)		5'10.9" (1800)
		Height	ft. in. (mm)	1'1.8" (350)	1'3.2" (385)	
	Max. lift above ground		ft. in. (mm)	1'3.7" (400)	1'4.5" (420)	1'5.0" (433)
	Max. drop below ground		ft. in. (mm)	1'3.9" (405)	1'8.1" (510)	1'8.7" (527)
	Angle	Left / Right	degree	-	25 / 25	
		Tilt	degree	-		10 / 10
Hydraulic oil (Reservoir / System)			gal (ℓ)	9.8 (37) / 17.7 (65)		
Fuel reservoir			gal (ℓ)	17.4 (66.0)		
Operating weight (Including operator's weight @ 165 lbs.)	Rubber	Canopy / Cab	lbs. (kg)	9182 (4165) / 9480 (4300)	9623 (4365) / 9910 (4495)	9965 (4520) / 10251 (4650)
	Steel	Canopy / Cab	lbs. (kg)	9348 (4240) / 9645 (4375)	9777 (4435) / 10075 (4570)	10119 (4590) / 10417 (4725)


**Specification data when using powerhole.*

DIMENSIONS

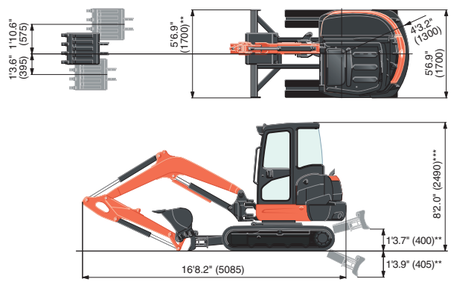

6-in-1 Blade **Angle Blade**

Unit: ft. in. (mm)

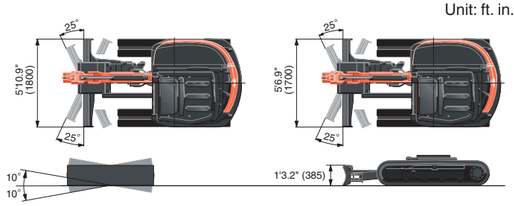

***Specifications for Standard blade model.*
****Specifications for cab model.*

Kubota Tractor Corporation reserves the right to change the stated specifications without notice. This brochure is for descriptive purposes only and reasonable efforts were used to set forth the contained information; some items shown may be optional and some products shown may not be available at all dealerships. Kubota disclaims all representations and warranties, express or implied, or any liability from the use of this brochure. For complete warranty, safety and product information, consult your local Kubota dealer and the operator's manual. Power (HP/KW) and other specifications are based on various standards or recommended practices. For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications. This brochure is intended for the United States and US territories only. For information regarding Kubota products or services outside these areas, see Kubota Corporation's global web site. Kubota does not provide parts, warranty or service for any Product which is re-sold or retailed in any country other than the country for which the Product(s) were designed or manufactured.

KUBOTA TRACTOR CORPORATION
1000 Kubota Drive, Grapevine, TX 76051 Tel 888-4 KUBOTA
Visit our web site at: www.kubotausa.com

©2024 Kubota Corporation



Cat. No.8994B-01-US Printed in Japan '24-10D. ◁▷. 32

For Earth, For Life
Kubota

KUBOTA COMPACT EXCAVATOR

KX040-5


The superior compact excavator that combines exceptional strength and versatility with performance and user-friendly operation.




Specifications

Model				KX057-5	KX057-5 Angle Blade
Type of ROPS / FOPS				Canopy / Cab	
Type of tracks				Rubber, Steel	Rubber, Steel
Engine	Model			V2607-CR-E5-BH1 / V2607-CR-E5-BH2	
	Output (SAE J1995 gross)		HP (kW) / rpm	47.6 (35.5) @ 2200	
	Output (SAE J1349 net)		HP (kW) / rpm	46.4 (34.6) / 45.5 (33.9) @ 2200	
	Displacement		cu. in. (cc)	159.6 (2615)	
Dimensions	Overall length		ft. in. (mm)	18'1" (5520)	
	Overall height		ft. in. (mm)	8'4" (2550)	
	Overall width		ft. in. (mm)	6'5" (1960)	
	Min. ground clearance		ft. in. (mm)	12.2" (310)	
Hydraulic system	Pump capacity		GPM (ℓ/min)	14.8 (56.1) Variable × 2 / 9.8 (37.0) Gear × 1	
	Auxiliary hydraulic flow	AUX1 / AUX2	GPM (ℓ/min)	19.8 (75) / 9.8 (37)	
	Max. breakout force	Bucket / Arm	lbs. (kgf)	10172 (4614) / 5463 (2478)	
Drive system	Travel speed	Low / High	mph (km/h)	1.8 (2.8) / 3.1 (4.9)	
	Max. traction force	Low speed	lbs. (kgf)	14480 (6567)	
	Tumbler distance		ft. in. (mm)	6'6" (1990)	
	Crawler length		ft. in. (mm)	8'2" (2500)	
	Shoe width	Rubber / Steel	ft. in. (mm)	15.7" (400)	
	Ground contact pressure	Rubber Canopy / Cab	psi (kgf/cm²)	4.6 (0.32) / 4.7 (0.33)	4.8 (0.33) / 4.9 (0.34)
		Steel Canopy / Cab	psi (kgf/cm²)	4.7 (0.33) / 4.8 (0.33)	4.9 (0.34) / 4.9 (0.35)
Swing system	Unit swing speed		rpm	9.2	
	Boom swing angle	Left / Right	degree	70 / 55	
Blade	Dimensions	Width	ft. in. (mm)	6'5.2" (1960)	
		Height	ft. in. (mm)	16.1" (410)	16.7" (425)
	Max. lift above ground		in. (mm)	17.3" (440)	20.1" (510)
	Max. drop below ground		in. (mm)	15.9" (405)	18.3" (465)
	Angle	Left / Right	degree	–	25 / 25
Hydraulic oil (Reservoir / System)			gal (ℓ)	11.1 (41.9) / 20.3 (77.0)	
Fuel reservoir			gal (ℓ)	19.3 (73.0)	
Operating weight (Including operator's weight @ 165 lbs.)		Rubber Canopy / Cab	lbs. (kgf)	12346 (5600) / 12577 (5705)	12820 (5815) / 13051 (5920)
		Steel Canopy / Cab	lbs. (kgf)	12632 (5730) / 12864 (5835)	13106 (5945) / 13338 (6050)

Dimensions

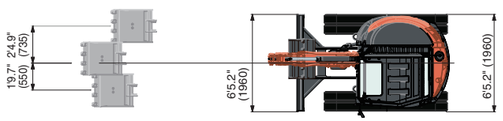

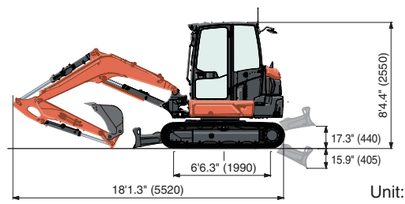

Unit: ft. in. (mm)

Kubota Tractor Corporation reserves the right to change the stated specifications without notice. This brochure is for descriptive purposes only and reasonable efforts were used to set forth the contained information; some items shown may be optional and some products shown may not be available at all dealerships. Kubota disclaims all representations and warranties, express or implied, or any liability from the use of this brochure. For complete warranty, safety and product information, consult your local Kubota dealer and the operator's manual. Power (HP/KW) and other specifications are based on various standards or recommended practices. For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications. This brochure is intended for the United States and US territories only. For information regarding Kubota products or services outside these areas, see Kubota Corporation's global web site. Kubota does not provide parts, warranty or service for any Product which is re-sold or retailed in any country other than the country for which the Product(s) were designed or manufactured.

KUBOTA TRACTOR CORPORATION
1000 Kubota Drive, Grapevine, TX 76051 Tel 888-4 KUBOTA
Visit our web site at: www.kubotausa.com

©2026 Kubota Corporation





Cat. No.8967E-01-US Printed in Japan '26-03D. <2>. 6.4

For Earth, For Life
Kubota

KUBOTA COMPACT EXCAVATOR

KX057-5


The next generation of mini excavators with advanced performance, comfort, and technology.




SPECIFICATIONS

Model				KX080-5	KX080-5 Angle Blade
Type of cabin				ROPS / OPG (TOP Guard, Level I)	
Type of tracks				Rubber / Steel	
Engine	Model			Kubota V3307-CR-TE5	
	Output (SAE J1995 gross)		HP (kW)/rpm	66.6 (49.7) / 2000	
	Output (SAE J1349 net)		HP (kW)/rpm	62.3 (46.5) / 2000	
	Displacement		cu. in. (cc)	203.3 (3331)	
Dimensions	Overall length		ft. in. (mm)	21'1.9" (6450)	
	Overall height		ft. in. (mm)	8'4" (2540)	
	Overall width		ft. in. (mm)	7'2.6" (2200)	
	Min. ground clearance		in. (mm)	14.0 (355)	
Hydraulic system	Pump capacity		GPM (ℓ/min)	22.3 (84.6) Variable × 2	
	Auxiliary hydraulic flow		GPM (ℓ/min)	26.4 (100) / 14.7 (55.8)	
	Max. breakout force	Bucket / Arm	lbf. (kgf)	14660 (6650) / 8554 (3880)	
Drive system	Travel speed	Low / High	mph (km/h)	1.7 (2.7) / 3.0 (4.8)	
	Max. traction force	Low speed	lbf. (kgf)	15062 (6832)	
	Tumbler distance		ft. in. (mm)	7'6.6" (2300)	
	Crawler length		ft. in. (mm)	9'6.2" (2900)	
	Shoe width	Rubber / Steel	in. (mm)	17.7" (450) / 17.7" (450) (opt. 24" (610))	
	Ground contact pressure	Rubber / Steel	psi (kgf/cm^2)	5.29 (0.372) / 5.35 (0.376)	5.56 (0.391) / 5.60 (0.394)
Swing system	Unit swing speed		rpm	9.8	
	Boom swing angle	Left / Right	degree	67 / 60	
Blade	Dimensions	Width	ft. in. (mm)	7'2.6" (2200)	
		Height	ft. in. (mm)	19.7" (500)	20.1" (510)
	Max. lift above ground		in. (mm)	19.7" (500)	22.8" (580)
	Max. drop below ground		in. (mm)	19.7" (500)	25.2" (640)
	Angle		degree	—	25
Hydraulic oil (reservoir / system)			gal (ℓ)	19.8 (75) / 38.6 (146)	
Fuel reservoir			gal (ℓ)	30.4 (115)	
Operating weight (Including operator's weight @165 lbs.)		Rubber / Steel	lbs. (kg)	18520 (8400) / 18760 (8510)	19470 (8830) / 19620 (8900)

DIMENSIONS

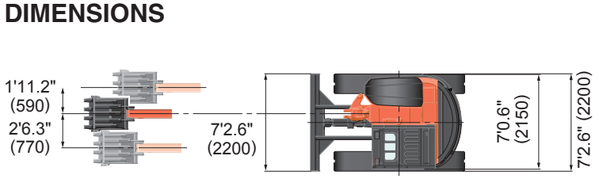

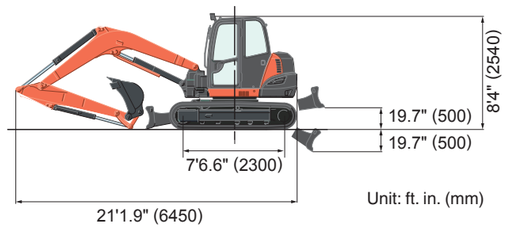

Unit: ft. in. (mm)

Kubota Tractor Corporation reserves the right to change the stated specifications without notice. This brochure is for descriptive purposes only and reasonable efforts were used to set forth the contained information; some items shown may be optional and some products shown may not be available at all dealerships. Kubota disclaims all representations and warranties, express or implied, or any liability from the use of this brochure. For complete warranty, safety and product information, consult your local Kubota dealer and the operator's manual. Power (HP/KW) and other specifications are based on various standards or recommended practices. For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications. This brochure is intended for the United States and US territories only. For information regarding Kubota products or services outside these areas, see Kubota Corporation's global web site. Kubota does not provide parts, warranty or service for any Product which is re-sold or retailed in any country other than the country for which the Product(s) were designed or manufactured.

KUBOTA TRACTOR CORPORATION
1000 Kubota Drive, Grapevine, TX 76051 Tel 888-4 KUBOTA
Visit our web site at: www.kubotausa.com

©2025 Kubota Corporation



Cat. No.8991C-01-US Printed in Japan '25-09D.

For Earth, For Life
Kubota

KX

KUBOTA POWER UTILITY EXCAVATOR

KX080-5

Powerful and easy to operate, the KX080-5 with the updated features makes it an excellent choice for your power utility excavation jobs.

