



Engine	Cummins QSK23
Rated Power	567 kW (760 hp / 771 ps) @ 1,800 rpm
Maximum Dig Depth	8,059 mm
Standard Bucket Capacity	9.0 m ³
Operating Weight	126,000 kg

9135F EXCAVATOR

TOUGH WORLD. TOUGH EQUIPMENT.

9135F SPECIFICATIONS >>>

ENGINE

Emissions Rating	China Stage III
Manufacturer	Cummins
Model	QSK23
Rated Power	567 kW (760 hp / 771 ps) @ 1,800 rpm
Peak Torque	3,468 N·m @ 1,350 rpm
Number of Cylinders	6
Displacement	23 L

UNDERCARRIAGE

Shoe Width	700 mm
Number of Shoes per Side	50
Number of Carrier Rollers per Side	3
Number of Track Rollers per Side	8

BOOM & ARM

Boom Length	7,550 mm
Arm Length	3,200 mm

BUCKET PERFORMANCE

Bucket Heaped Capacity (Std.)	9.0 m³
Bucket Heaped Capacity (Optional)	7.0 m³

TRACK DRIVE

Maximum Travel Speed	3.3 km/h
Drawbar Pull	710 kN

SERVICE REFILL CAPACITIES


Fuel Tank	1,520 L
Engine Oil	70 L
Cooling System	106.7 L
Hydraulic Oil Tank	750 L
Hydraulic System Total	1,150 L

HYDRAULIC SYSTEM

Main Pumps Total Flow	1,725 L/min
Relief Pressure, main	37 MPa

SWING SYSTEM

Swing Speed	6.2 r/min
-------------	-----------


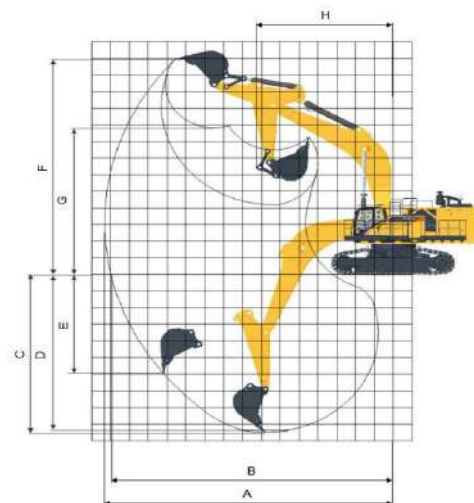


WORKING RANGE

A. Max. Digging Reach	13,876 mm
B. Max. Digging Reach on Ground	13,505 mm
C. Max. Digging Depth	8,059 mm
D. Max. Digging Depth, 2.5 m (8') Level	7,897 mm
E. Max. Vertical Wall Digging Depth	6,634 mm
F. Max. Cutting Height	12,508 mm
G. Max. Dumping Height	7,775 mm
H. Min. Front Swing Radius	6,628 mm
Bucket Digging Force (ISO)	613 kN
Arm Digging Force (ISO)	520 kN

DIMENSION

A. Transport Length	6,767 mm
B. Transport Height	3,246 mm
C. Track Gauge	3,900 mm
D. Transport Width	3,725 mm
E. Length to Center of Rollers	5,220 mm
F. Track Length	6,624 mm
G. Overall Width of Upper Structure	5,743 mm
H. Tail Swing Radius	4,900 mm
I. Counterweight Ground Clearance	1,851 mm
J. Overall Height of Cab	1,839 mm
K. Min. Ground Clearance	1,084 mm
L. Track Shoe Width	700 mm

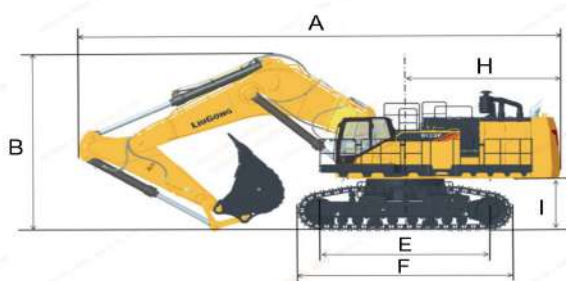

Guangxi Liugong Machinery Co., Ltd.

No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China
T: +86 772 3886124 E: overseas@liugong.com
www.liugong.com

Specifications and designs are subject to change without notice. Machines shown may include optional equipment. Liugong standard and optional equipment may vary from region to region. Please consult your Liugong dealer for information specific to your area. Engine power kW is converted to horsepower (1 kW=1.3596 ps and 1 kW=1.3410 hp) in this file.

04/2026 Designed by Liugong
Replace the previous versions of 03/2025