


SPECIFICATIONS

Model				U17-5	
Type of ROPS / OPG (TOP Guard, Level I)				Canopy	
Type of tracks				Rubber	
Engine	Model			D902-E4-BH-6EU	
	Output (SAE J1995 gross)		HP (kW) / rpm	16.1 (12.0) / 2300	
	Output (SAE J1349 net)		HP (kW) / rpm	15.1 (11.3) / 2300	
	Displacement		cu. in. (cc)	54.8 (898)	
Dimensions	Overall length		ft. in. (mm)	11'7.7" (3550)	
	Overall height		ft. in. (mm)	7'9.3" (2370)	
	Overall width	Standard	ft. in. (mm)	4'3.2" (1300)	
		Narrow	ft. in. (mm)	3'3.4" (1000)	
	Track gauge	Standard	ft. in. (mm)	4'3.2" (1300)	
		Narrow	ft. in. (mm)	3'3.0" (990)	
	Min. ground clearance		in. (mm)	6.1" (155)	
Hydraulic system	Pump capacity		GPM (ℓ/min)	4.6 (17.3)	
	Auxiliary hydraulic flow		GPM (ℓ/min)	7.3 (27.7)	
	Max. breakout force	Bucket / Arm	lbf. (kgf)	3552 (1609) / 1956 (887)	
	Drive system	Travel speed	Low / High	mph (km/h)	1.4 (2.3) / 2.7 (4.4)
Max. traction force		Low speed	lbf. (kgf)	3170 (1438)	
Tumbler distance		ft. in. (mm)	4'0.4" (1230)		
Crawler length		ft. in. (mm)	5'2.2" (1580)		
Shoe width		in. (mm)	9" (230)		
Ground contact pressure		psi (kgf / cm ²)	4.0 (0.29)		
Swing system		Unit swing speed		rpm	9.4
	Boom swing angle	Left / Right	degree	63 / 58	
Blade	Dimensions	Width Standard / Narrow	ft. in. (mm)	4'3.2" (1300) / 3'3.0" (990)	
		Height	in. (mm)	10.2" (260)	
	Max. lift above ground		in. (mm)	11.0" (280)	
	Max. drop below ground		in. (mm)	8.1" (205)	
Hydraulic oil (Reservoir / System)			gal (ℓ)	3.4 (13) / 5.8 (21.8)	
Fuel reservoir			gal (ℓ)	5.3 (20)	
Operating weight (Including operator's weight @ 165 lbs.)			lbs. (kg)	3902 (1770)	

DIMENSIONS

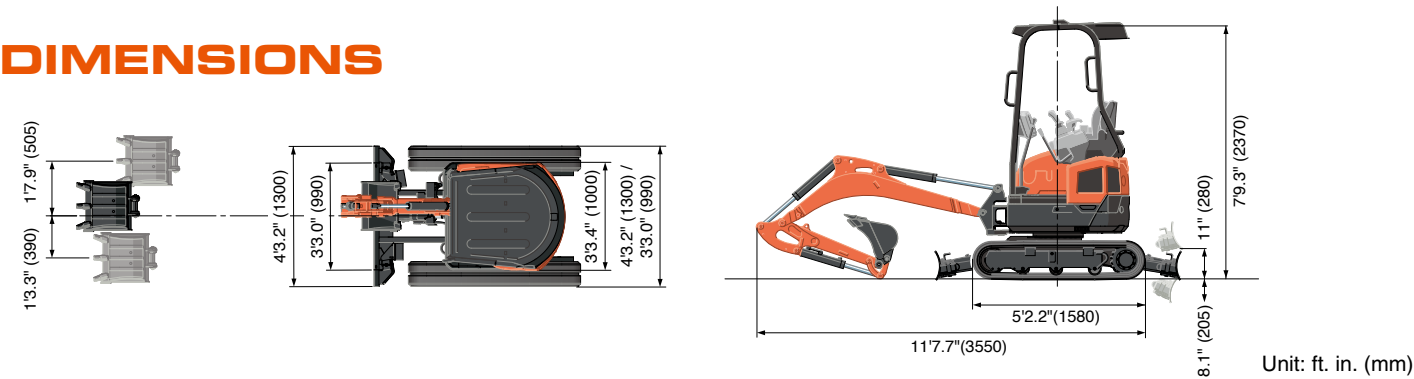

Kubota Tractor Corporation reserves the right to change the stated specifications without notice. This brochure is for descriptive purposes only and reasonable efforts were used to set forth the contained information; some items shown may be optional and some products shown may not be available at all dealerships. Kubota disclaims all representations and warranties, express or implied, or any liability from the use of this brochure. For complete warranty, safety and product information, consult your local Kubota dealer and the operator's manual. Power (HP/KW) and other specifications are based on various standards or recommended practices. For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications. This brochure is intended for the United States and US territories only. For information regarding Kubota products or services outside these areas, see Kubota Corporation's global web site. Kubota does not provide parts, warranty or service for any Product which is re-sold or retailed in any country other than the country for which the Product(s) were designed or manufactured.



KUBOTA TRACTOR CORPORATION
1000 Kubota Drive, Grapevine, TX 76051 Tel 888-4 KUBOTA
Visit our web site at: www.kubotausa.com

©2025 Kubota Corporation



**Kubota
Genuine Parts**
for excellent
performance,
durability and
safety





For Earth, For Life


U

KUBOTA ZERO TAIL SWING COMPACT EXCAVATOR
U17-5

Kubota's U17-5 zero-tail swing compact excavator gives you the performance and efficiency you need in tight spaces.





For Earth, For Life
Kubota

U

KUBOTA TIGHT TAIL SWING COMPACT EXCAVATOR **U27-4**


Compact and durable enough to tackle demanding tasks in tight working conditions with ease.



SPECIFICATIONS

Model				U27-4	
Type of ROPS/FOPS				Canopy / Cab	
Type of tracks				Rubber	
Engine	Model			Kubota D1105-BH	
	Output (SAE J1995 gross)		HP (kW)/rpm	20.9 (15.6) / 2400	
	Output (SAE J1349 net)		HP (kW)/rpm	20.0 (14.9) / 2400	
	Displacement		cu.in. (cc)	68.5 (1123)	
Dimensions	Overall length		ft. in.(mm)	13'6" (4100)	
	Overall height	Canopy / Cab	ft. in.(mm)	7'11" (2420) / 7'10" (2400)	
	Overall width		ft. in.(mm)	4'11" (1500)	
	Min. ground clearance		in.(mm)	12.1 (307)	
Hydraulic system	Pump capacity		gpm (ℓ/min.)	7.6 (28.8) × 2 / 5.1 (19.2) × 1	
	Auxiliary hydraulic flow		gpm (ℓ/min.)	12.7 (48)	
	Max. breakout force	Bucket / Arm	lbs. (kgf)	7014 (3180) / 2777 (1260)	
Drive system	Travel speed	Low / High	mph (km/h)	1.6 (2.6) / 2.7 (4.3)	
	Max. traction force	Low speed	lbs. (kgf)	6767 (3069)	
	Tumbler distance		ft. in.(mm)	5'1.4" (1560)	
	Crawler length		ft. in.(mm)	6'6.3" (1990)	
	Shoe width	Rubber	in.(mm)	11.8 (300)	
	Ground contact pressure	Canopy	psi (kgf/cm²)	3.321 (0.234)	
		Cab	psi (kgf/cm²)	3.481 (0.245)	
Swing system	Unit swing speed		rpm	9.9	
	Boom swing angle	Left / Right	degree	75 / 55	
Blade	Dimension	Width	ft. in.(mm)	4'11" (1500)	
		Height	ft. in.(mm)	11.8" (300)	
	Max. lift above ground		in.(mm)	14.2" (360)	
	Max. drop below ground		in.(mm)	12.6" (320)	
Hydraulic oil (reservoir / system)			gal (ℓ)	5.8 (22) / 9.7 (37)	
Fuel reservoir			gal (ℓ)	8.7 (33)	
Operating weight (Includes operator weight 175lbs.)		Canopy	Rubber	lbs. (kgf)	5688 (2580)
		Cab	Rubber	lbs. (kgf)	5908 (2680)

DIMENSIONS

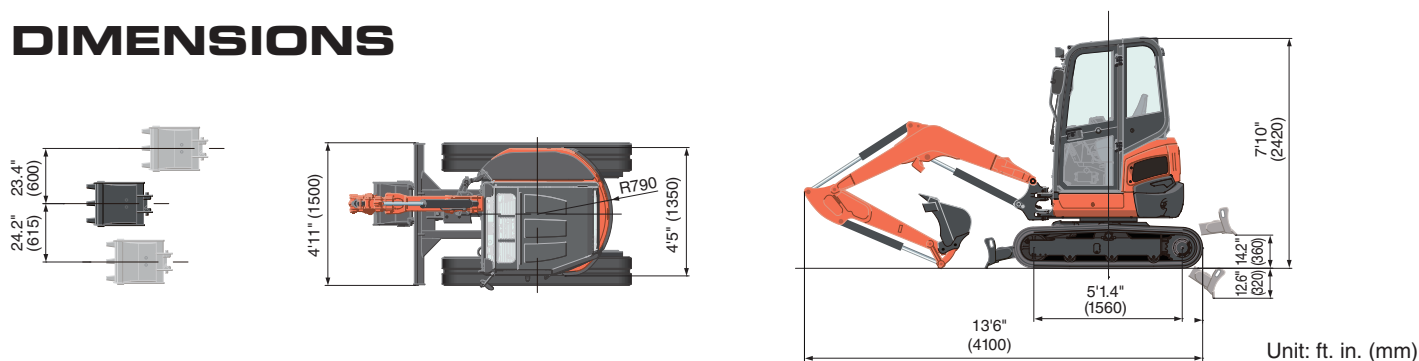

Kubota Tractor Corporation reserves the right to change the stated specifications without notice. This brochure is for descriptive purposes only and reasonable efforts were used to set forth the contained information; some items shown may be optional and some products shown may not be available at all dealerships. Kubota disclaims all representations and warranties, express or implied, or any liability from the use of this brochure. For complete warranty, safety and product information, consult your local Kubota dealer and the operator's manual. Power (HP/KW) and other specifications are based on various standards or recommended practices. For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications. This brochure is intended for the United States and US territories only. For information regarding Kubota products or services outside these areas, see Kubota Corporation's global web site. Kubota does not provide parts, warranty or service for any Product which is re-sold or retailed in any country other than the country for which the Product(s) were designed or manufactured.



KUBOTA TRACTOR CORPORATION

1000 Kubota Drive, Grapevine, TX 76051 Tel 888-4 KUBOTA

Visit our web site at: www.kubotausa.com

©2021 Kubota Corporation



**Kubota
Genuine Parts**
for maximum
performance,
durability and
safety





KUBOTA TIGHT TAIL SWING COMPACT EXCAVATOR

U

U35-4

The U35-4 has a new cab so spacious, so comfortable and so deluxe, you'll think you're in a 5-ton machine.





SPECIFICATIONS

Model				U35-4	U35-4 Angle Blade
Type of ROPS / FOPS				Canopy / Cab	
Type of tracks				Rubber / Steel	Rubber / Steel
Engine	Model			Kubota D1703M-DI-E4	
	Output (SAE J1995 gross)		HP (kW) / rpm	24.8 (18.5) / 2200	
	Output (SAE J1349 net)		HP (kW) / rpm	23.9 (17.8) / 2200	
	Displacement		cu. in. (cc)	100.5 (1647)	
Dimensions	Overall length		ft. in. (mm)	15'7" (4749)	
	Overall height		ft. in. (mm)	8'1.2 (2470)	
	Overall width		ft. in. (mm)	5'6.9" (1700)	
	Min. ground clearance		in. (mm)	11.34 (288)	
Hydraulic system	Pump capacity		GPM (ℓ/min)	10.5 (39.6.) x 2 / 5.5 (20.9) x 1	
	Auxiliary hydraulic flow	AUX1	GPM (ℓ/min)	15.8 (60)	
	Max. breakout force	Bucket / Arm	lbs. (kgf)	7924 (3594) / 4451 (2019)	
Drive system	Travel speed		Low / High	mph (km/h)	
	Max. traction force		Low speed	lbs. (kgf)	
	Tumbler distance		ft. in. (mm)	5'6.5" (1688)	
	Crawler length		ft. in. (mm)	6'10" (2084)	
	Shoe width	Rubber	in. (mm)	11.8 (300)	
	Ground contact pressure	Rubber Canopy / Cab	psi (kgf/cm ²)	4.89 (0.34) / 5.08 (0.36)	5.10 (0.36) / 5.19 (0.36)
		Steel Canopy / Cab	psi (kgf/cm ²)	5.00 (0.35) / 5.19 (0.36)	5.21 (0.37) / 5.40 (0.38)
Swing system	Unit swing speed		rpm	8.9	
	Boom swing angle	Left / Right	degree	71 / 45	
Blade	Dimensions	Width	ft. in. (mm)	5'6.9" (1700)	
		Height	ft. in. (mm)	1'1.5" (343)	1'3.2" (385)
	Max. lift above ground		in. (mm)	14.65 (372)	15.98 (406)
	Max. drop below ground		in. (mm)	14.53 (369)	18.74 (476)
	Angle	Left / Right	degree	-	25 / 25
Hydraulic oil (Reservoir / System)			gal (ℓ)	11.8 (44.6) / 16.1 (61)	
Fuel reservoir			gal (ℓ)	12.4 (46.9)	
Operating weight (Including operator's weight @ 175 lbs.)	Rubber Canopy / Cab		lbs. (kgf)	8129 (3687) / 8451 (3833)	8478 (3845) / 8800 (3991)
	Steel Canopy / Cab		lbs. (kgf)	8325 (3776) / 8647 (3922)	8674 (3934) / 8996 (4080)

The company reserves the right to change the above specifications without notice. This brochure is for descriptive purposes only. Please contact your local Kubota dealer for warranty information. For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt for almost all applications.

DIMENSIONS

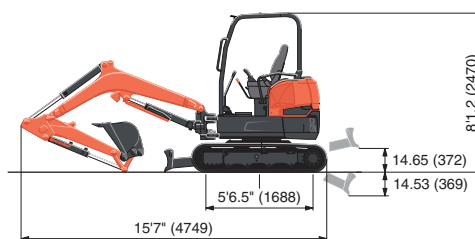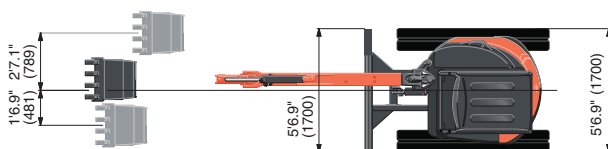

Unit: ft. in. (mm)



KUBOTA TRACTOR CORPORATION

Kubota Tractor Corporation, 3401 Del Amo Boulevard, Torrance CA 90503
 Western Division: 1175 S. Guild Ave., Lodi, CA 95240 Tel (209) 334-9910
 Central Division: 14855 FAA Boulevard, Fort Worth, TX 76155 Tel (817) 571-0900
 Northern Division: 6300 at One Kubota Way, Groveport, OH 43125 Tel (614) 835-1100
 Southeast Division: 1025 Northbrook Parkway, Suwanee, GA 30024 Tel (770) 995-8855


Visit our web site at: www.kubota.com



Specifications

Model				U48-5		U48-5 Angle Blade	
Type of ROPS / FOPS				Canopy / Cab			
Type of tracks				Rubber / Steel		Rubber / Steel	
Engine	Model			D1803-CR-TE5-BH3 / D1803-CR-TE5-BH4			
	Output (SAE J1995 gross) HP (kW) @ rpm			40.4 (30.1) @ 2200			
	Output (SAE J1349 net) HP (kW) @ rpm			38.9 (29.0) / 38.5 (28.7) @ 2200			
	Displacement cu. in. (cc)			111.4 (1826)			
Dimensions	Overall length ft. in. (mm)			17'7" (5355)			
	Overall height ft. in. (mm)			8'4" (2550)			
	Overall width ft. in. (mm)			6'5" (1960)			
	Min. ground clearance in. (mm)			12" (310)			
Hydraulic system	Pump capacity GPM (ℓ/min)			31.4 (118.8)			
	Auxiliary hydraulic flow	AUX1 / AUX2	GPM (ℓ/min)	17.2 (65.0) / 9.8 (37)			
	Max. breakout force	Bucket / Arm	lbs. (kgf)	9304 (4220) / 5304 (2406)			
Drive system	Travel speed	Low / High	mph (km/h)	1.7 (2.8) / 3.0 (4.9)			
	Max. traction force	Low speed	lbs. (kgf)	11993 (5440)			
	Tumbler distance ft. in. (mm)			6'6" (1990)			
	Crawler length ft. in. (mm)			8'2" (2500)			
	Shoe width in. (mm)			15.7" (400) / 15.7" (400)			
	Ground contact pressure	Rubber Canopy / Cab	psi (kgf/cm²)	4.0 (0.284) / 4.1 (0.289)		4.2 (0.296) / 4.3 (0.302)	
		Steel Canopy / Cab	psi (kgf/cm²)	4.1 (0.290) / 4.2 (0.295)		4.3 (0.302) / 4.4 (0.307)	
Swing system	Unit swing speed rpm			9.2			
	Boom swing angle	Left / Right	degree	70 / 53			
Blade	Dimensions	Width	ft. in. (mm)	6'5" (1960)			
		Height	ft. in. (mm)	1'4" (410)		1'5" (425)	
	Max. lift above ground in. (mm)			1'5" (440)		1'8 (510)	
	Max. drop below ground in. (mm)			1'4" (405)		1'6" (465)	
	Angle	Left / Right	degree	—		25 / 25	
Hydraulic oil (Reservoir / System)			gal (ℓ)	10.6 (40) / 20.1 (76)			
Fuel reservoir			gal (ℓ)	17.4 (66.0)			
Operating weight (Including operator's weight @ 165 lbs.)		Rubber Canopy / Cab	lbs. (kgf)	10848 (4920) / 11057 (5015)		11322 (5135) / 11531 (5230)	
		Steel Canopy / Cab	lbs. (kgf)	11134 (5050) / 11342 (5145)		11608 (5265) / 11818 (5360)	

Dimensions

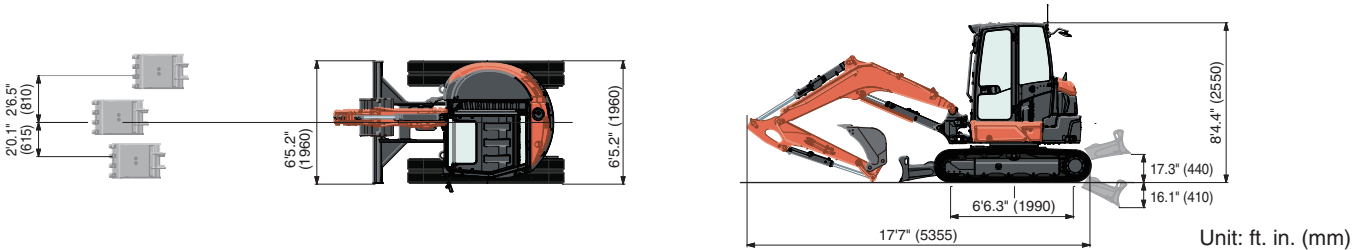

Kubota Tractor Corporation reserves the right to change the stated specifications without notice. This brochure is for descriptive purposes only and reasonable efforts were used to set forth the contained information; some items shown may be optional and some products shown may not be available at all dealerships. Kubota disclaims all representations and warranties, express or implied, or any liability from the use of this brochure. For complete warranty, safety and product information, consult your local Kubota dealer and the operator's manual. Power (HP/KW) and other specifications are based on various standards or recommended practices. For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications. This brochure is intended for the United States and US territories only. For information regarding Kubota products or services outside these areas, see Kubota Corporation's global web site. Kubota does not provide parts, warranty or service for any Product which is re-sold or retailed in any country other than the country for which the Product(s) were designed or manufactured.




KUBOTA TRACTOR CORPORATION
1000 Kubota Drive, Grapevine, TX 76051 Tel 888-4 KUBOTA
Visit our web site at: www.kubotausa.com

©2026 Kubota Corporation



SAFETY
IT'S THE WAY TO LIVE!

Kubota Genuine Parts
for maximum performance, durability and safety





For Earth, For Life
Kubota

U

KUBOTA TIGHT TAIL SWING COMPACT EXCAVATOR
U48-5


The next generation of tight tail swing compact excavators with advanced performance, comfort, and technology.



Specifications

Model				U55-5		U55-5 Angle Blade	
Type of ROPS / FOPS				Canopy / Cab			
Type of tracks				Rubber, Steel		Rubber, Steel	
Engine	Model			V2607-CR-E5-BH1 / V2607-CR-E5-BH2			
	Output (SAE J1995 gross)		HP (kW) @ rpm	47.6 (35.5) @ 2200			
	Output (SAE J1349 net)		HP (kW) @ rpm	46.4 (34.6) / 45.5 (33.9) @ 2200			
	Displacement		cu. in. (cc)	159.6 (2615)			
Dimensions	Overall length		ft. in. (mm)	17'12" (5475)			
	Overall height		ft. in. (mm)	8'4" (2550)			
	Overall width		ft. in. (mm)	6'5" (1960)			
	Min. ground clearance		in. (mm)	12.2" (310)			
Hydraulic system	Pump capacity		GPM (ℓ/min)	14.8 (56.1) Variable × 2 / 9.8 (37.0) Gear × 1			
	Auxiliary hydraulic flow	AUX1 / AUX2	GPM (ℓ/min)	19.8 (75) / 9.8 (37)			
	Max. breakout force	Bucket / Arm	lbs. (kgf)	10172 (4614) / 5869 (2662)			
Drive system	Travel speed		Low / High	mph (km/h)			
	Max. traction force		Low speed	lbs. (kgf)			
	Tumbler distance		ft. in. (mm)	6'6" (1990)			
	Crawler length		ft. in. (mm)	8'2" (2500)			
	Shoe width		in. (mm)	15.7" (400)			
	Ground contact pressure	Rubber Canopy / Cab	psi (kgf/cm²)	4.6 (0.32) / 4.6 (0.33)		4.7 (0.33) / 4.8 (0.34)	
		Steel Canopy / Cab	psi (kgf/cm²)	4.7 (0.33) / 4.7 (0.33)		4.8 (0.34) / 4.9 (0.34)	
Swing system	Unit swing speed		rpm	9.2			
	Boom swing angle	Left / Right	degree	70 / 55			
Blade	Dimensions	Width	ft. in. (mm)	6'5.2" (1960)			
		Height	ft. in. (mm)	16.1" (410)		16.7" (425)	
	Max. lift above ground		in. (mm)	17.3" (440)		20.1" (510)	
	Max. drop below ground		in. (mm)	15.9" (405)		18.3" (465)	
	Angle	Left / Right	degree	–		25 / 25	
Hydraulic oil (Reservoir / System)			gal (ℓ)	11.1 (41.9) / 20.3 (77.0)			
Fuel reservoir			gal (ℓ)	17.4 (66.0)			
Operating weight (Including operator's weight @ 165 lbs.)		Rubber Canopy / Cab	lbs. (kgf)	12247 (5555) / 12456 (5650)		12721 (5770) / 12930 (5865)	
		Steel Canopy / Cab	lbs. (kgf)	12533 (5685) / 12743 (5780)		13007 (5900) / 13217 (5995)	

Dimensions

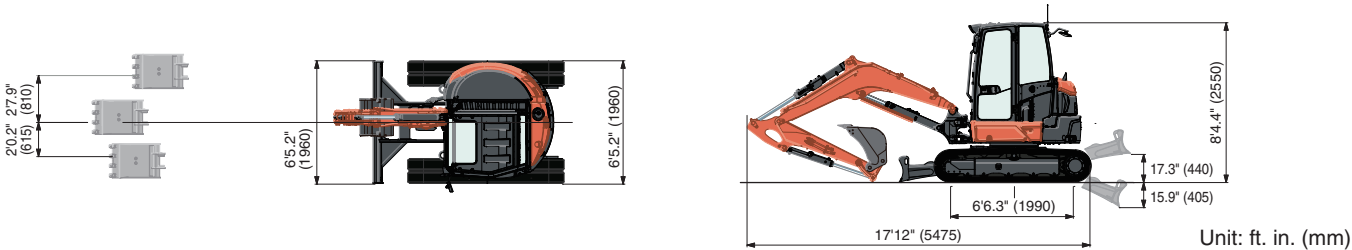

Kubota Tractor Corporation reserves the right to change the stated specifications without notice. This brochure is for descriptive purposes only and reasonable efforts were used to set forth the contained information; some items shown may be optional and some products shown may not be available at all dealerships. Kubota disclaims all representations and warranties, express or implied, or any liability from the use of this brochure. For complete warranty, safety and product information, consult your local Kubota dealer and the operator's manual. Power (HP/KW) and other specifications are based on various standards or recommended practices. For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications. This brochure is intended for the United States and US territories only. For information regarding Kubota products or services outside these areas, see Kubota Corporation's global web site. Kubota does not provide parts, warranty or service for any Product which is re-sold or retailed in any country other than the country for which the Product(s) were designed or manufactured.




KUBOTA TRACTOR CORPORATION
1000 Kubota Drive, Grapevine, TX 76051 Tel 888-4 KUBOTA
Visit our web site at: www.kubotausa.com

©2026 Kubota Corporation



Kubota Genuine Parts
for maximum performance, durability and safety





For Earth, For Life
Kubota

U

KUBOTA TIGHT TAIL SWING COMPACT EXCAVATOR
U55-5

The next generation of tight tail swing compact excavators with advanced performance, comfort, and technology.

